

The PUMPGUARD range by PulseGuard Ltd

Protects your pumps


Guard against pulsation

Quadruple pump valve life, Increase flow rates, Reduce noise dramatically, save more than a PUMPGUARD on piping costs.




Trade Since Jan 1978 Pulse since 1982

Pug-P2

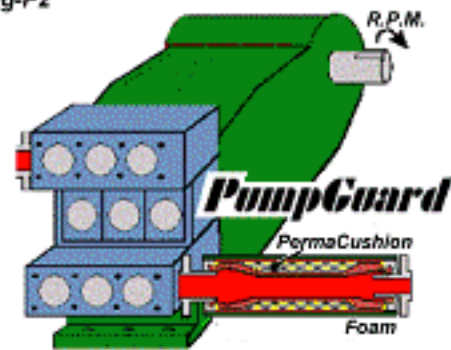


For 2" to 12" 600# pipe systems
THE BEST INVESTMENT IN THE PUMP BUSINESS.

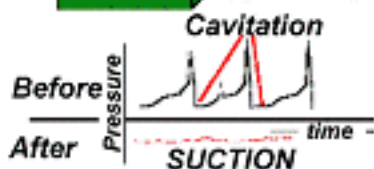

PUMPGUARD


Food & Drug Trim - Triclover / CB fittings

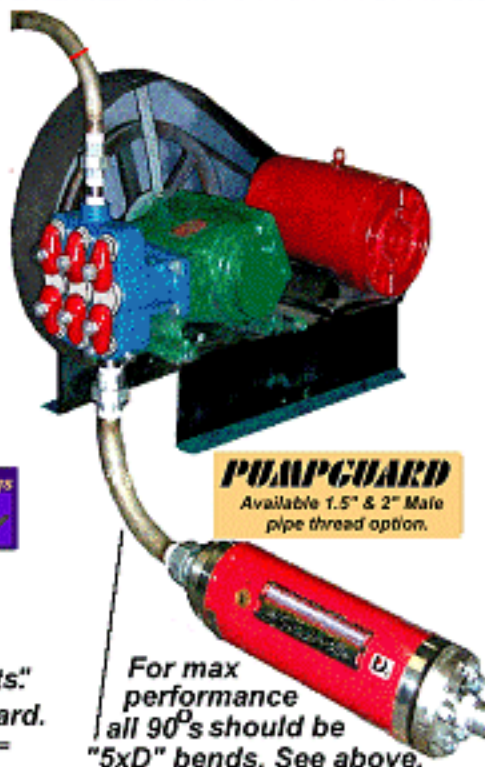

PUMPGUARD

Available 1.5" & 2" Male pipe thread option.


For max performance all 90°s should be "5xD" bends. See above.

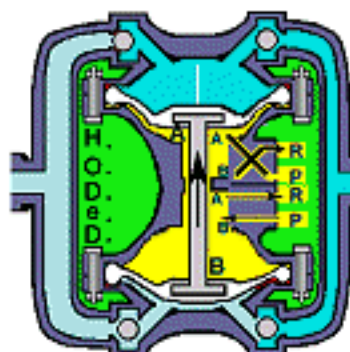

Hydraulically Operated Double ended Diaphragm pump. Up to 300psi / 20 Bar

PUMPGUARD Plas. PVC

All boltings are in to "thread-certs."
End faces to 150# flange standard.




PUMPGUARD

For highly viscous low pressure




systems, where elastomeric flex tubes are acceptable

TWIN & TRI LOBE PUMPS

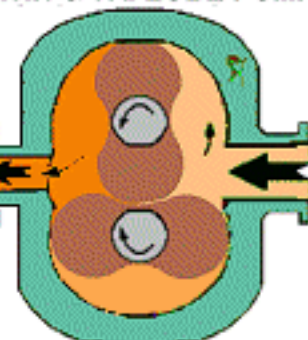

MIXING TANK

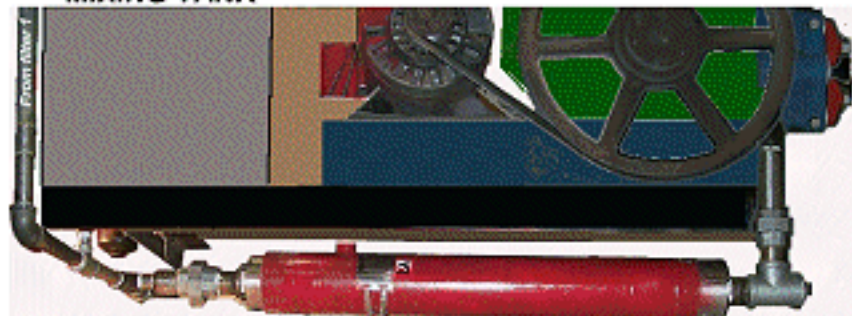

The **PUMPGUARD** was installed between a pair of suction filters and the pump suction manifold.

1. Tripled time between filter element changes.
2. A 6% increase in flow rate.
3. A db reduction 72 to 58, Paid for its self in 16 months.

For larger diameter dampeners, where the ratio of connection size to chamber diameter ensure the dissipation of intercepted higher frequency pressure pulsation, please see the PIPEHUGGER low and high pressure ranges.

GOTO www.pulseguard.com/pulsation_dampening/select_smooth_percentage_flow_or_pressure/pg_catalog/elastomer/tube/pug-p2.pdf & -----/pug/pug-p2.pdf