

The PULSEGUARD

Guard against Pulsation



Flexorber LP



With LDi Flexflon or E.I. DuPont Teflon



Under license from M. Parker since 1963

For the Ultimate in Smoothness where pressure is below 100 Bar, 1450 psi, & elastomer synthetic rubber is NOT compatible, and with Stainless N₂ drive bonnet


LP Flexobers are everywhere when pipes are longer than 200 times their diameter

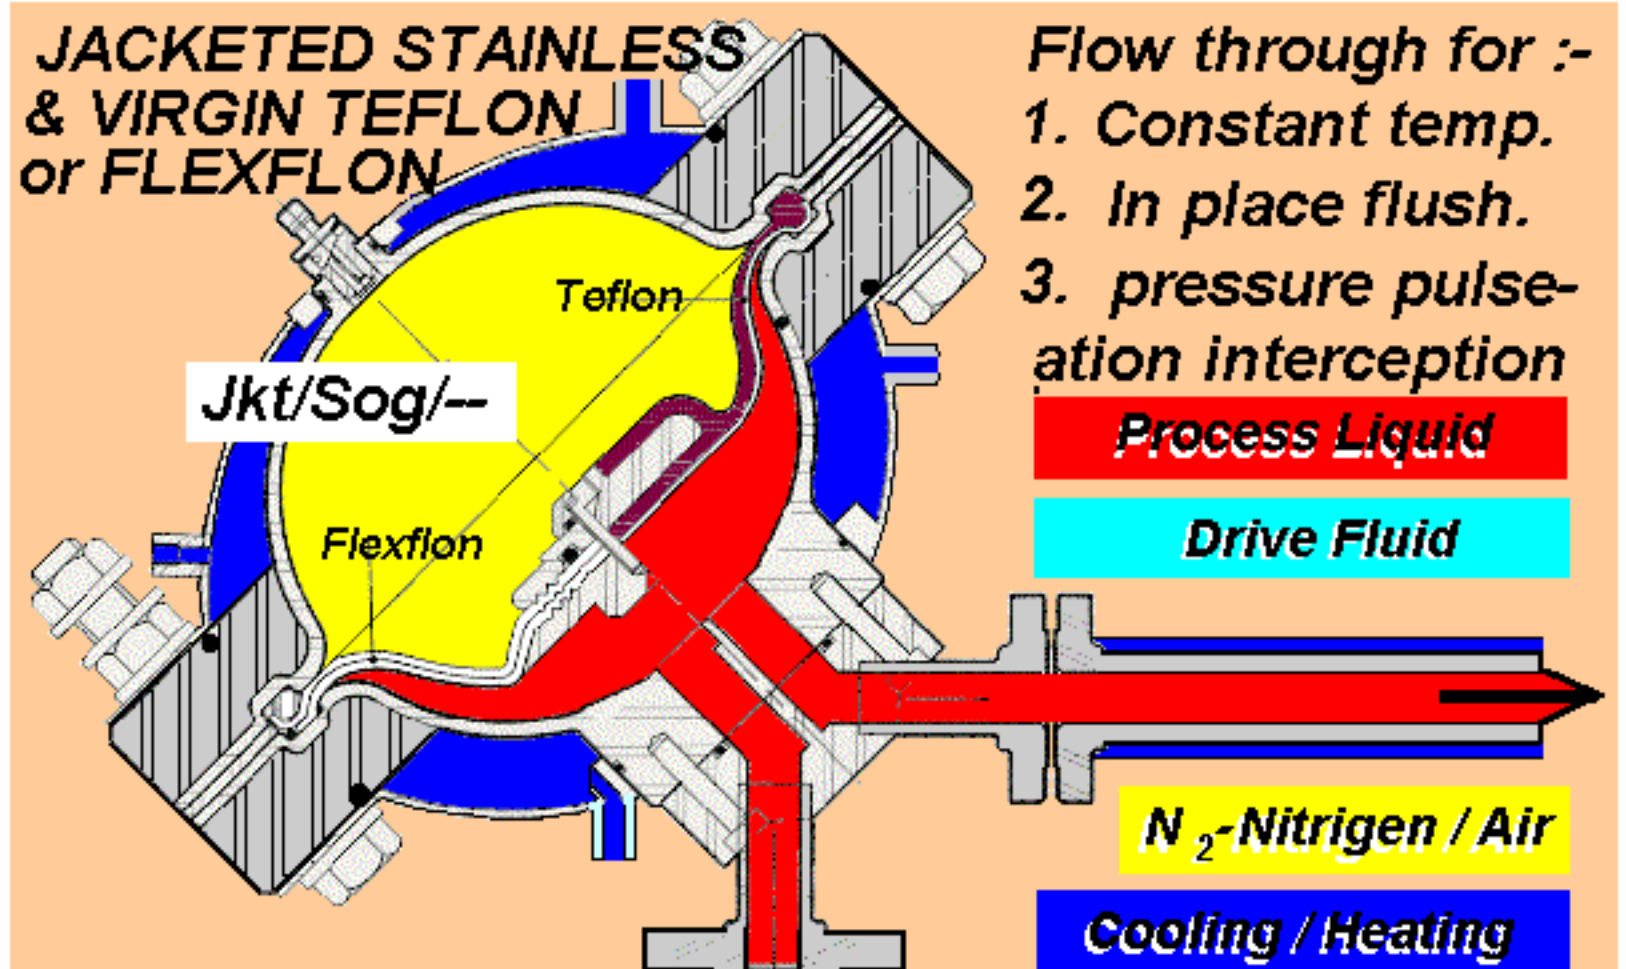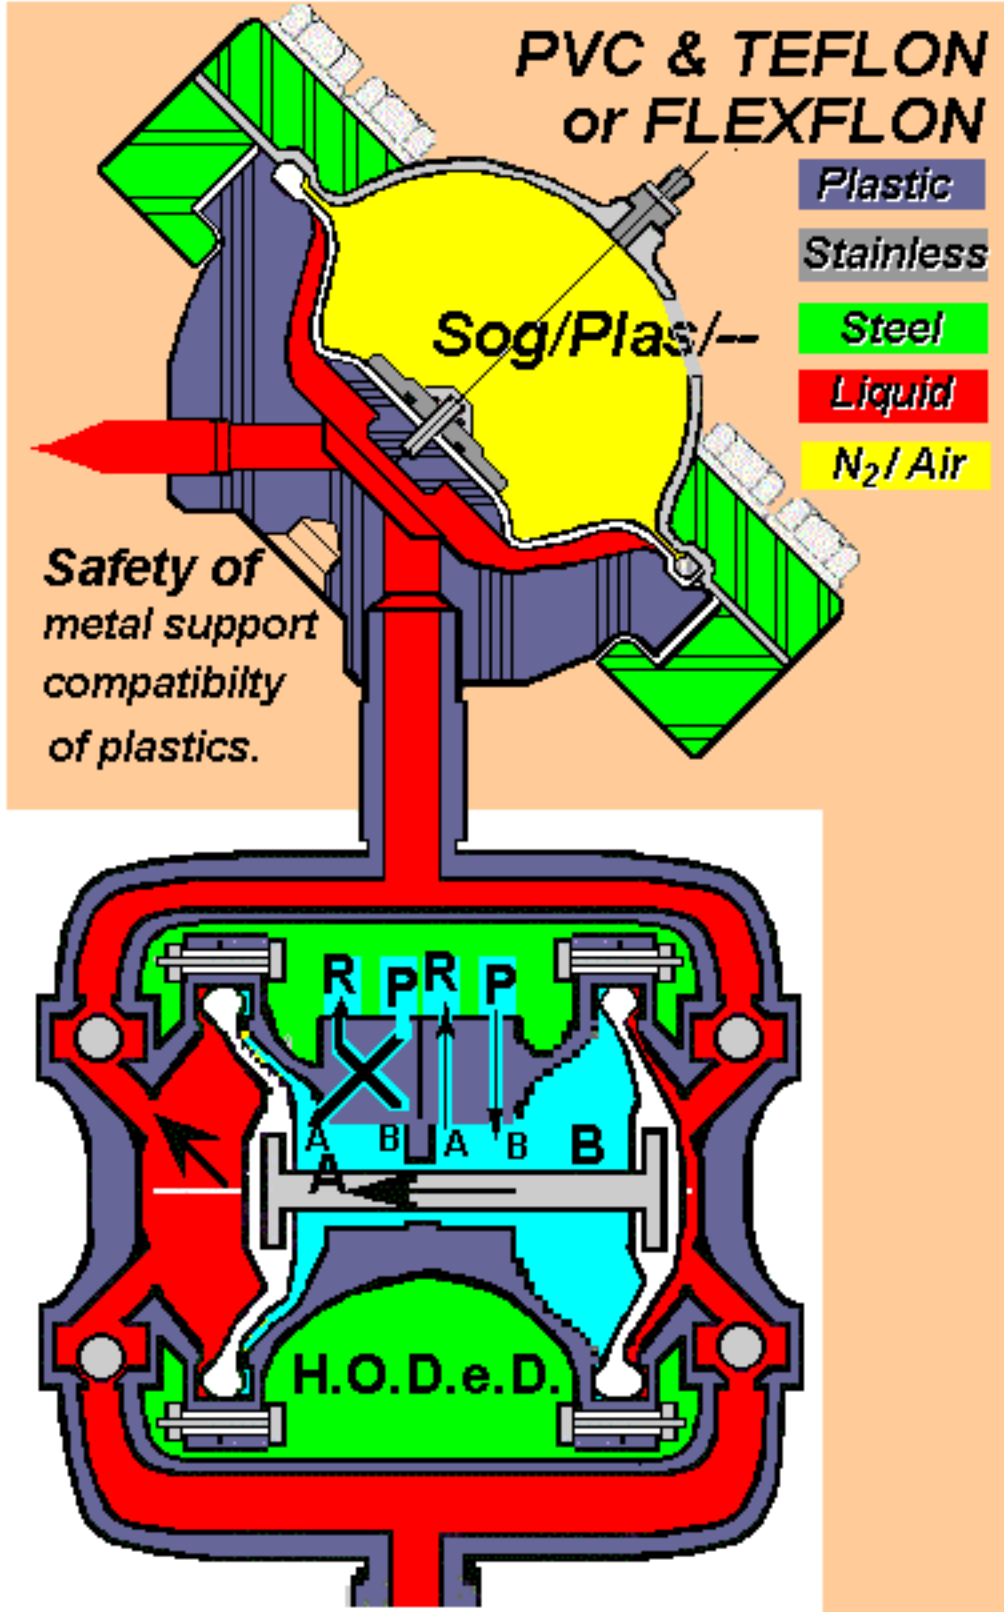


Flexflon diaphragms provide :-

- 1. 10 times more life than a machined bellows.
- 2. Greater impermeability
- 3. At half the cost.

From 0.5 in³ / 8ml
To 1000 in³ / 16+ Litres
100s "Off the shelf" inventory

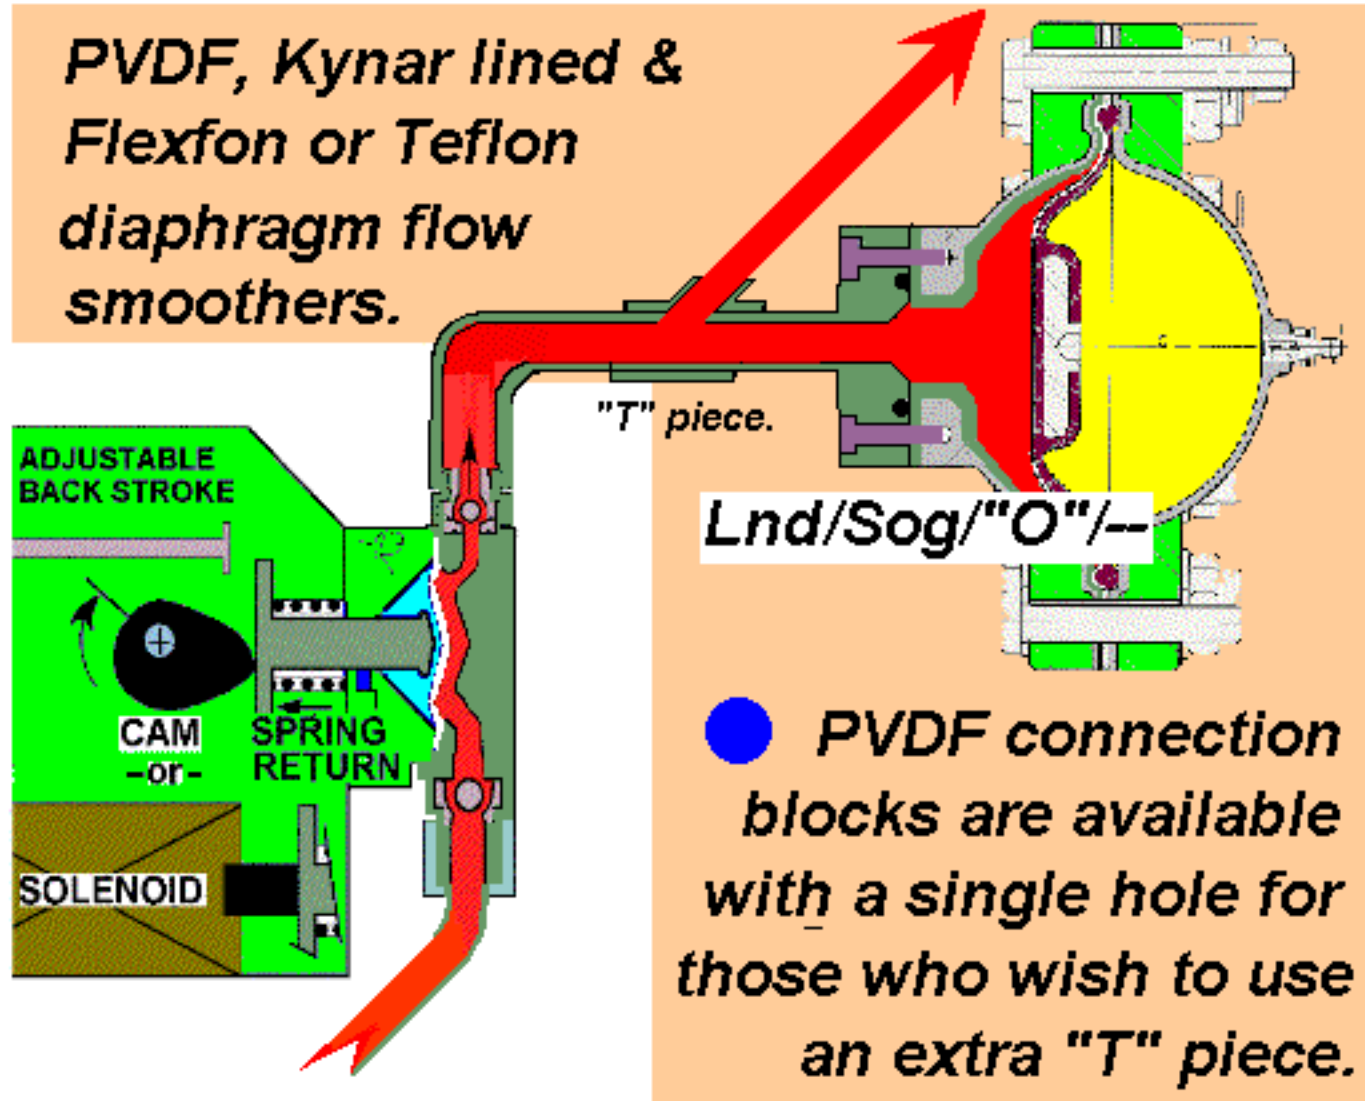

- PVDF connection blocks are available with a single hole for those who wish to use an extra "T" piece.

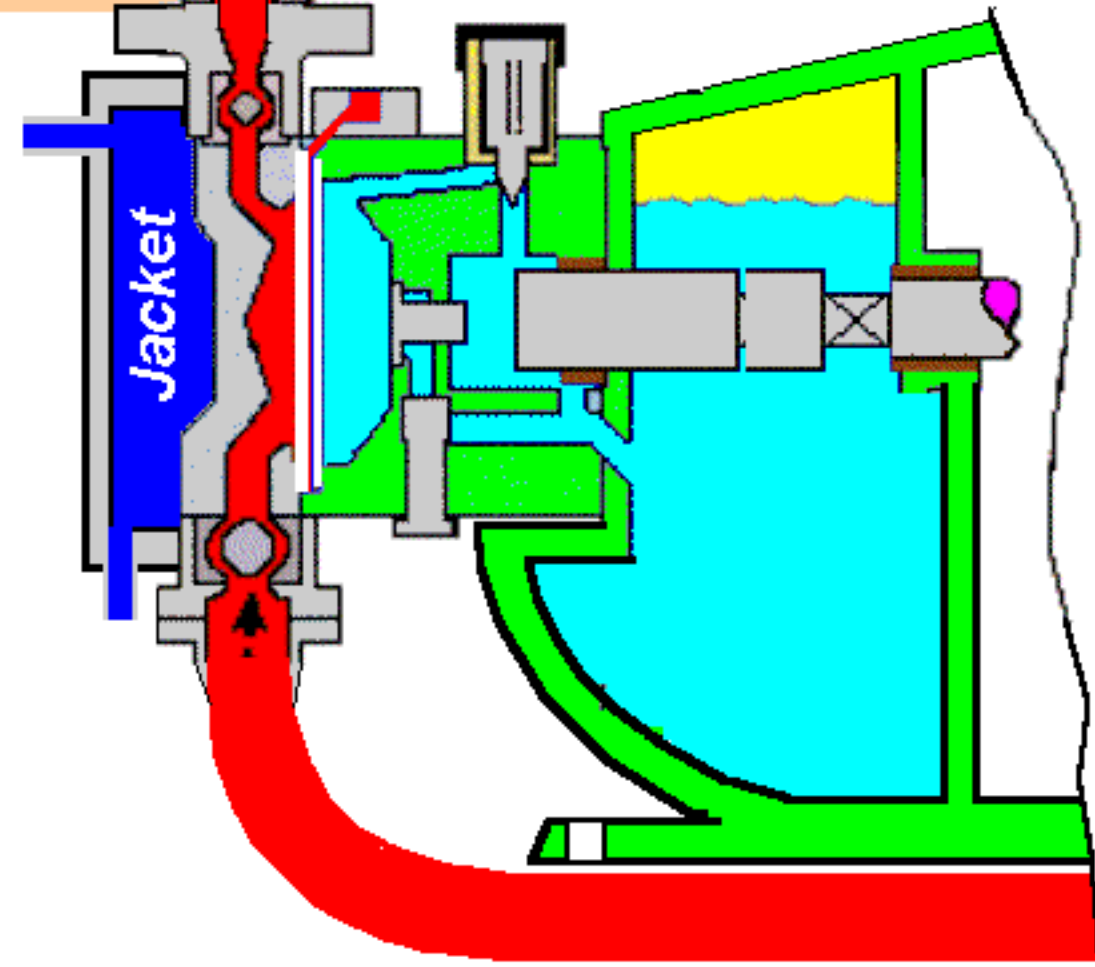

- Flow through gives you :-
- 3 times the smoothness, of a single connection "Td" off line.
 - Self purging in place flushability.
 - Constant agitation no sediment
 - 22% saving ; 2 ports are standard.

Teflon is a trade mark of E.I. DuPont De N. & Co. Inc. FLEXFLON is from "LDI"

Ask you customer if he wishes to DOWNLOAD A .PDF, PRINTABLE COLORED PAGE
goto http://www.pulseguard.com/pulsation_pampening/select_smooth_percentage/flow_or_pressure/find_pump_f/calc_dapmer_volume/select_pipe_method/ect/712catalog/peg/peg-p2a.pdf